

PEARLAMINA



contents

Product data 3

Wall Covering 4-6

Information 7



product data



Product description: Semi-Flexible Shell Surface Materials

Summary: Pearlamina is a semi-flexible surface material made of natural shell. The shell popularly known as Capiz is abundant in the Philippines was lay-outed on PP sheet. PP sheets are any of various thermoplastic resins that are polymers of propylene. They are hard though, and are used to make molded articles and fibers. Pearlamina are very thin tiles in available at 30 cm x 30 cm and 30 cm x 60 cm sizes. These are widely used as accent to walls, cabinetry, furniture, and other interior applications.

Pearlamina unlike any other surface covering in tile form are very thin and semi-flexible. Design primarily are formed with meticulously cut shells.

Main Material: Natural Capiz Shells

Applications: Interior Wall Coverings
Furniture Surface Material
Aesthetic Applications

Limitations: Not applicable for areas with direct sunlight and with high moisture such as kitchen and bathroom.

Sizes / Design : 40 Designs Available (<http://www.lacasadeco.com/products.php>)
30 cm x 30 cm x 0.09 ± cm
30 cm x 60 cm x 0.09 ± cm

Environment: Pearlamina is a durable surface material in PP substrate. PP (Polymer Propylene) is a recyclable material and is not hazardous to health.

Test / Examinations: EN-71 Part 3

wall covering

30X30
X 0.09±
CENTIMETERS

30X60
X 0.09±
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3



KORTELOCO
Gold



CARRÉ
Gold



CLASSIQUE
Gold




RAYAS
Gold



TRAKA
Gold



CERAYA
Gold

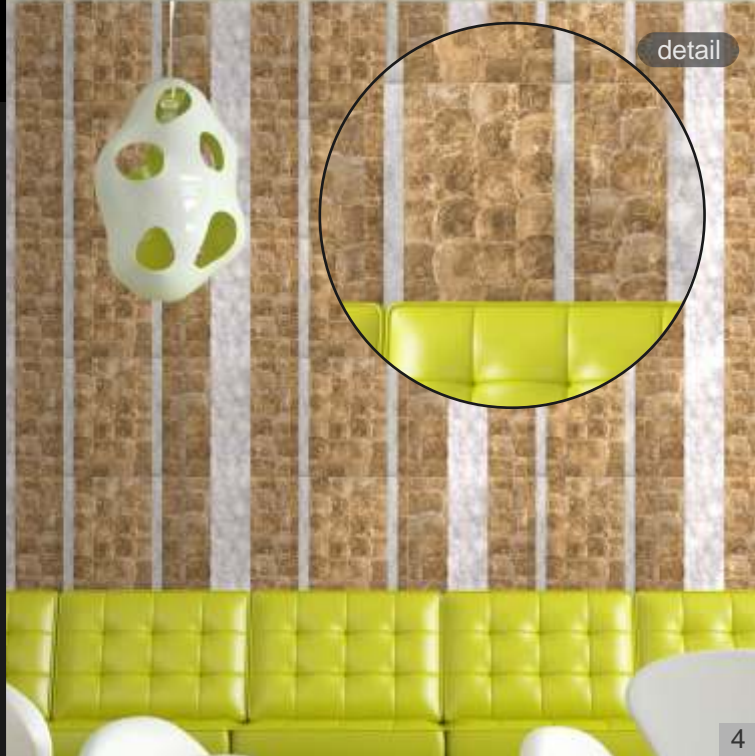

detail

wall covering

30X30
X 0.09±
CENTIMETERS

30X60
X 0.09±
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3



PINQA
Pearl



CLASSIQUE
Pearl



MASAIIKU



BRIQUE
Pearl



CARRÉ
Pearl



DESI
Pearl



wall covering

30X30
X 0.09±
CENTIMETERS

30X60
X 0.09±
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3




LINI
Pearl



LIKKI
Pearl



KLORÉE



VIERDOTE
Pearl



PINQA



CIATA
Duo Gold



DOREZZ



LIPSO
Duo Gold



detail

information

Installation

Using vinyl- over- vinyl (VOV) adhesive or non-water based adhesive. Apply even coat of adhesive to the product, being extra careful at its edges. Allow installed tiles to rest for 5 to 8 minutes. Immediately wipe off excess paste with a soft damp cloth, and dry with a clean soft cloth afterwards. If there is an adhesive on the surface of capiz, & can not be cleaned by damp cloth, use diluted alcohol on the soft cloth and wipe off.

Cutting and Repair

Trim with a very sharp, single edge razor blade. Use a new blade for each cut. Sight irregularities on the edges remedied with a sanding block or finer sand paper, and then apply polyurethane to seal it (Always test on scrap materials before applying on any given installed surface.)

Seams

If gaps occur at the joints of tiles, use similar color latex caulk on tiles. Any excess filler/caulk must be removed immediately. The area must then be washed down with soapy water to remove any residue. Wipe it off but avoid scratching the surface.

Clean and Care

Wipe the area using the soft damp cloth. Dry with a soft cloth to avoid scratching the surface. Material flaking might occur. Do not peel it off instead cut off protruding flakes with a sharp razor blade then apply polyurethane to seal it. Do not rub hard on its surface with steel brush or with rough motion.

Tools

New & sharp blade, Ruler, Flat surface working table. Vinyl over vinyl or non-water based adhesive, polyurethane coat, latex paint. Clean cloth.





additional information

- Capiz tiles are not to be soaked in water or to be installed in areas where it comes in direct contact with water (e.g. kitchen and bathroom). A water resistant polyurethane coat may be applied to prevent absorption of moisture.
- Flaking may occur during shipment or installation. Do not peel off flakes. Instead, use a sharp blade to delicately cut off excess flakes and gently finish with sandpaper. Wipe clean and apply a coat of polyurethane to secure.
- Use of an air-gun tucker may cause a small hole on the tile. It is recommended that latex paint be used to fill the hole and apply a coat of polyurethane to seal.
- Because capiz is a natural material, fading or slight changes in color may occur. It is best that the tiles not be exposed to any direct or bright sunlight.
- Contact a water-based polyurethane supplier for correct application procedures. It is best to use one that can prevent yellowing and/or discoloration. La casa deco will not be held responsible for any undesirable effect of polyurethane application.



la casa deco, inc.

www.lacasadeco.com

Philippines

China

Taiwan