

VERSEA



contents

Product Data 3

Wall Covering 4-7

Information 8



product data



Product Description: Unconventionally Textured Shell Wall Covering

Summary: This product is available in 4ft x 8ft and is customizable in colors and design type. The combination of Capiz shells and colors have come together to form a wall panels designed to offer an innovative and dynamic way for indoor wall coverings and concepts.

Environmental and Strong are the right words to describe Versea. It uses a water based top coat finishes which bonds all the Capiz shells. This makes the Versea more ecological for indoor use.

Main Material: Natural Capiz Shells

Applications: Interior Wall Coverings
Furniture Surface Material
Aesthetic Applications

Limitations: Not applicable for areas with direct sunlight and with high moisture such as kitchen and bathroom.

Sizes | Design: 17 Designs Available (<http://www.lacasadeco.com/products.php>)
8 cm x 60 cm x 0.5 cm
60 cm x 120 cm x 0.5 cm
60 cm x 240 cm x 0.5 cm

Environment: Life-cycle analysis and independent studies have shown PVC's environmental impact to be favorable when compared to other materials used for construction. PVC can be recycled and can be used in mixed plastic recycling. It can be safely incinerated and formaldehyde free. In relation to shells, the Bureau of Fisheries & Aquatic Resources of the Philippines issued a certificate allowing harvesting of Capiz shells since it is a rapid-renewable resource and is not considered endangered at all.

Test | Examinations: EN-71 Part 3

wall covering

8X60
X 05
CENTIMETERS

60X120
X 05
CENTIMETERS

60X240
X 05
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3

detail



CRACK-Teak



CRACK-Chocolate



CRACK-WhiteGold



CRACK-SilverPearl



wall covering

8X60
X 0.5
CENTIMETERS

60X120
X 0.5
CENTIMETERS

60X240
X 0.5
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3

detail



PRINTS-Ribbon Silver




PRINTS-Corps Gold



PRINTS-Pellet Gold



PRINTS-Pellet Bronze

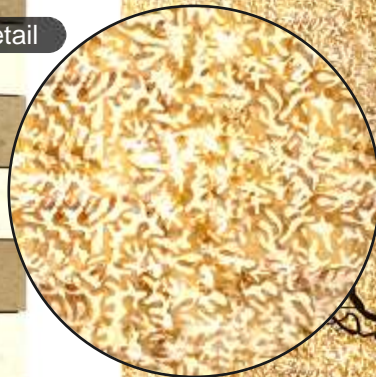

wall covering

8X60
X 0.5
CENTIMETERS

60X120
X 0.5
CENTIMETERS

60X240
X 0.5
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3

detail



ROCK-Gold



ROCK-Bronze



ROCK-Silver



wall covering

8X60
X 0.5
CENTIMETERS

60X120
X 0.5
CENTIMETERS

60X240
X 0.5
CENTIMETERS

MADE
NATURAL
CAPIZ
SHELLS

PASSED
EN-71 Part 3

detail



FROSTED-Stucco



FROSTED-Honey



information

Installation

Using vinyl- over- vinyl (VOV) adhesive. Apply even coat of adhesive to the product, being extra care-ful at its edges. Allow installed tiles to rest for 5 to 8 minutes. For bigger size of the capiz tiles airgun tucker can be used together with adhesive to ensure the installation. Immediately wipe off excess paste with a soft damp cloth and dry with a clean soft cloth afterwards. If there is adhesive on the surface of capiz, and can not be cleaned by damp cloth, use dilute alcohol on the soft cloth and wipe it off.

Cutting and repair

Trim with cutting machine. (To avoid damage, capiz surface must be face-up when cutting) Slight irregularities on the edges can be remedied by gentle hand sanding of edges with a sanding block or finer sandpaper, then apply a polyurethane coat to seal it. (Always test on scrap materials before applying on any given installed surface.)

Seams

If gaps occur at the joints of tiles, use similar color latex caulk on tiles. Any excess filler/caulk must be removed immediately. The area must then be washed down with soapy water to remove any residue. Wipe it off but avoid scratching the surface.

Clean and Care

Wipe the area using the soft damp cloth. Dry with a soft cloth to avoid scratching the surface. Material flaking might occur. Do not peel it off instead cut off protruding flakes with a sharp razor blade then apply polyurethane to seal it. Do not rub hard on its surface.

Tools

Cutting machine, Air-gun tucker, Flat surface working table, Vinyl- over- vinyl or non-water based adhesive, polyurethane coat, latex paint. Clean cloth.





additional information

- Capiz tiles are not to be soaked in water or to be installed in areas where it comes in direct contact with water (e.g. kitchen and bathroom). A water resistant polyurethane coat may be applied to prevent absorption of moisture.
- Flaking may occur during shipment or installation. Do not peel off flakes. Instead, use a sharp blade to delicately cut off excess flakes and gently finish with sandpaper. Wipe clean and apply a coat of polyurethane to secure.
- Use of an air-gun tucker may cause a small hole on the tile. It is recommended that latex paint be used to fill the hole & apply a coat of polyurethane to seal.
- Because capiz is a natural material, fading or slight changes in color may occur. It is best that the tiles not be exposed to any direct or bright sunlight.
- Contact a water-based polyurethane supplier for correct application procedures. It is best to use one that can prevent yellowing and/or discoloration. la casa deco will not be held responsible for any undesirable effect of polyurethane application.



la casa deco, inc.

www.lacasadeco.com

Philippines

China

Taiwan